



TKC-BRF12series current sensor is an open loop device based on the measuring principle of the hall effect, with a galvanic isolation between primary and secondary circuits. It provides accurate electronic measurements of DC, AC or pulsed currents.


## Electrical data (Ta=25°C±5°C, RL=2KΩ, CL=10000PF)

<div>Type</div> <div>Parameter</div>	TKC50 BRF12	TKC100 BRF12	TKC200 BRF12	TKC300 BRF12	TKC400 BRF12	TKC500 BRF12	TKC600 BRF12	Unit
Rated input (Ipn)	±50	±100	±200	±300	±400	±500	±600	A
Measure range	±100	±200	±400	±600	±800	±900	±900	A
Rated output	@Ip=±Ipn ±1±1%							V
Zero voltage	@Ip=0 2.5±0.5%							V
Reference voltage	2.5±0.5%							V
Supply voltage	+12±5%							V
Power Consumption	≤20							mA
Zero offset voltage	≤±20							mV
Magnetic offset	±15	±10						mV
Offset drift	≤±1.0	≤±0.5						mV/°C
output drift	≤±1.0	≤±0.5						mV/°C
Linearity	@Ip=0-±Ipn ≤1							%FS
Response time	@50A/μS, 10%-90% ≤3							μS
Bandwidth	@-3dB DC-25							KHz
Galvanic isolation	@ 50HZ,AC,1min 2.5							KV

## Applications

- AC variable speed drives
- Static converters for DC motor drives
- Variable speed drives
- Power supplies for welding applications
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)

## Mechanical dimension (for reference only)

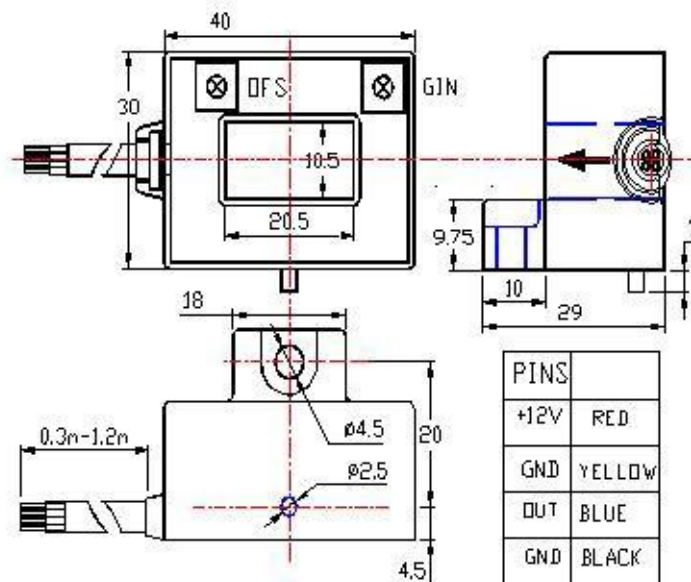

Remarks :

1. All dimensions are in mm.
2. General tolerance  $\pm 1\text{mm}$ .

## Directions for use

1. When the current will be measured goes through a sensor, the voltage will be measured at the output end. (Note: The false wiring may result in damage of the sensor)
2. Customs can adjust Output amplitude of the sensor by needs.
3. Custom design in the different rated input current and output voltage are available.

**Standards**


UL94-V0  
EN60947-1:2004  
IEC60950-1:2001  
EN50178:1998  
SJ 20790-2000

**General data**

	Value	Unit	Symbol
Operating temperature	-40 to +105	°C	TA
Storage temperature	-40 to +125	°C	TS
Mass(approx.)	80	g	M

**Characteristics chart**

Pulse current signal response characteristic

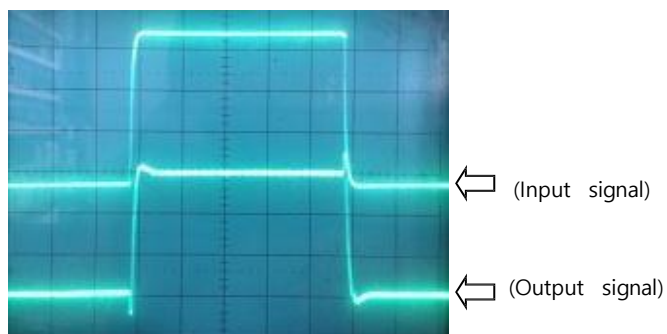

Effects of impulse noise

