



TBC- BTS4V series current sensor is a closed loop device based on the measuring principle of the hall effect and null balance method, with a galvanic isolation between primary and secondary circuit. It provides accurate electronic measurement of DC, AC or pulsed currents.


## Electrical data (Ta=25°C±5°C)

<div>Type</div> <div>Parameter</div>	TBC50BTS4V	TBC100BTS4V	TBC150BTS4V	TBC200BTS4V	TBC300BTS4V	Unit
Rated input （I <sub>pn</sub> ）	50	100	150	200	300	A
Measure range （I <sub>p</sub> ）	150	300	450	500	600	A
Turns ratio (N <sub>p</sub> /N <sub>s</sub> )	1:1000	1:2000	1:1500	1:2000	1：3000	T
Inside resistance	20± 0.1%,25PPM/°C 0.5W	20± 0.1%,25PPM/°C 0.5W	10± 0.1%,25PPM/°C 1.0W	10± 0.1%,25PPM/°C 1.0W	10± 0.1%,25PPM/°C 1.0W	Ω
Rated output	±4±0.5%					V
Coil resister @70°C	20	30	30	3	50	Ω
Supply voltage	±12 ~ ±18					V
Power consumption	≤20+I <sub>p</sub> X (N <sub>p</sub> /N <sub>s</sub> )					mA
Zero offset	@I <sub>p</sub> =0					

## Applications

- AC variable speed drives
- Static converters for DC motor drives
- Variable speed drives
- Power supplies for welding applications
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)

## Mechanical dimension (for reference only)

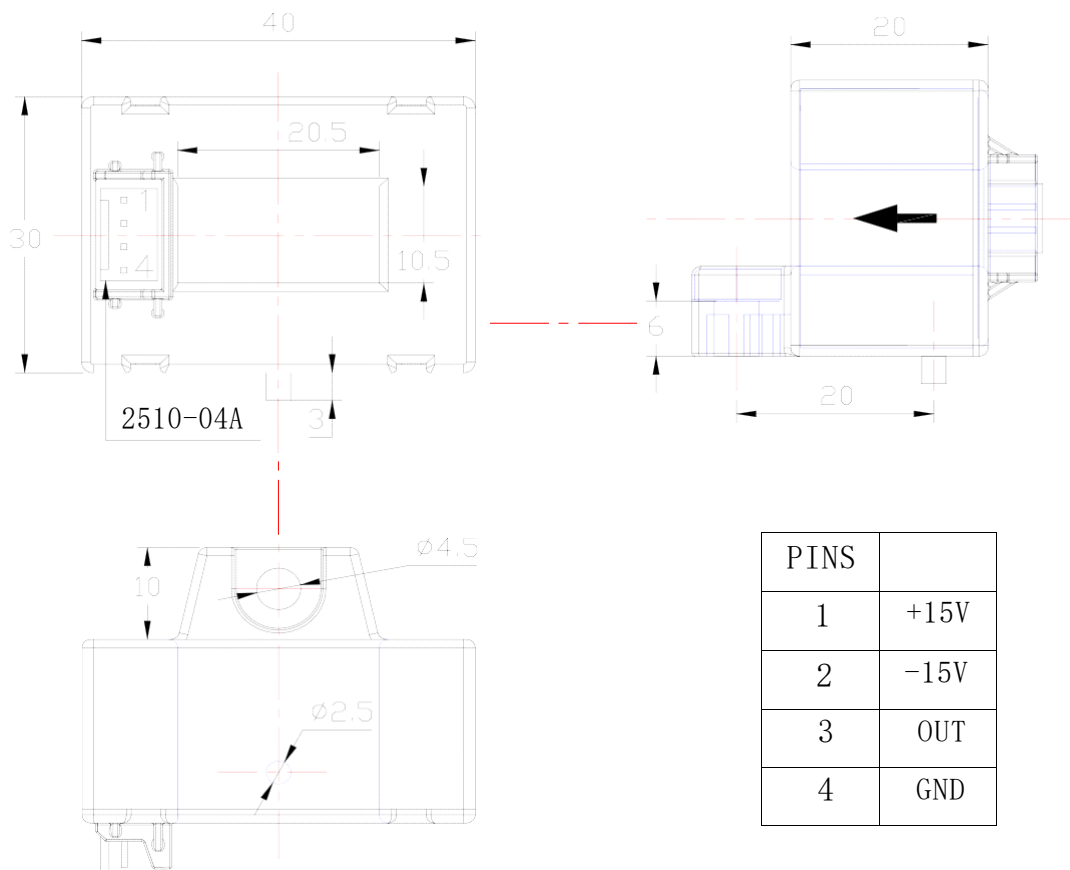

Remarks :

1. All dimensions are in mm.
2. General tolerance  $\pm 1\text{mm}$ .

## Directions for use

1. When measure current flows according to the direction of the arrowhead, Output terminal gets the same phase current.
2. When the current will be measured goes through a sensor, the current will be measured at the output end. (Note: The false wiring may result in the damage of the sensor)
3. Custom design in the different rated input current and the output current are available.

## Standards


UL94-V0  
EN60947-1:2004  
IEC60950-1:2001  
EN50178:1998  
SJ 20790-2000

## General data

	Value	Unit	Symbol
Operating temperature	-40 to +85	°C	TA
Storage temperature	-40 to +125	°C	TS
Mass(approx)	40	g	M

## Characteristics chart

Pulse current signal response characteristic

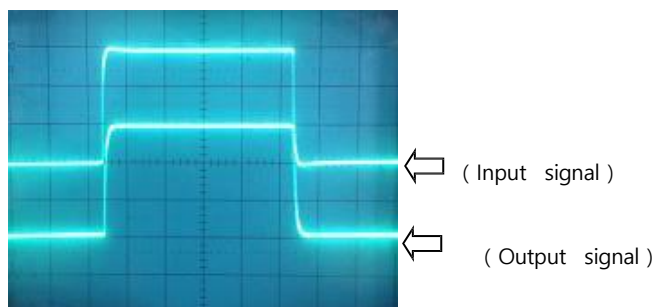

Effects of impulse noise

