



TBC- LPT-2series current sensor is a closed loop device based on the measuring principle of the hall effect and null balance method, with a galvanic isolation between primary and secondary circuit. It provides accurate electronic measurement of DC, AC or pulsed currents.


Electrical data (Ta=25°C±5°C)

Type Parameter	TBC125LPT-2	TBC150LPT-2	TBC200LPT-2	Unit
Rated input (I _{pn})	125	150	200	A
Measure range (I _p)	500(±18V , 15Ω)	600(±18V , 10Ω)	600(±18V , 10Ω)	A
Turns ratio (N _p /N _s)	1:2000	1:2000	1:2000	T
Secondary coil resister	45	45	45	Ω
Rated output (I _{sn})	62.5±0.5%	75±0.5%	100±0.5%	mA
Measure resister (R _M)	10-100			Ω
Supply voltage	±12 ~ ±18			V
Power consumption	≤20+I _p X(N _p /N _s)			mA
offset current	@I _p =0	≤±0.2		mA
Offset current drift		≤±0.5		mA
Linearity	@I _p =0-±I _{pn}	≤0.1		%FS
Band-width	@-3dB	DC-200		KHz
Response time	@100A/μS,10%-90%	≤1		μs
Galvanic isolation	@ 50HZ,AC,1min	3.0		KV

Applications

- AC variable speed drives
- Static converters for DC motor drives
- Variable speed drives
- Power supplies for welding applications
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)

Mechanical dimension (for reference only)

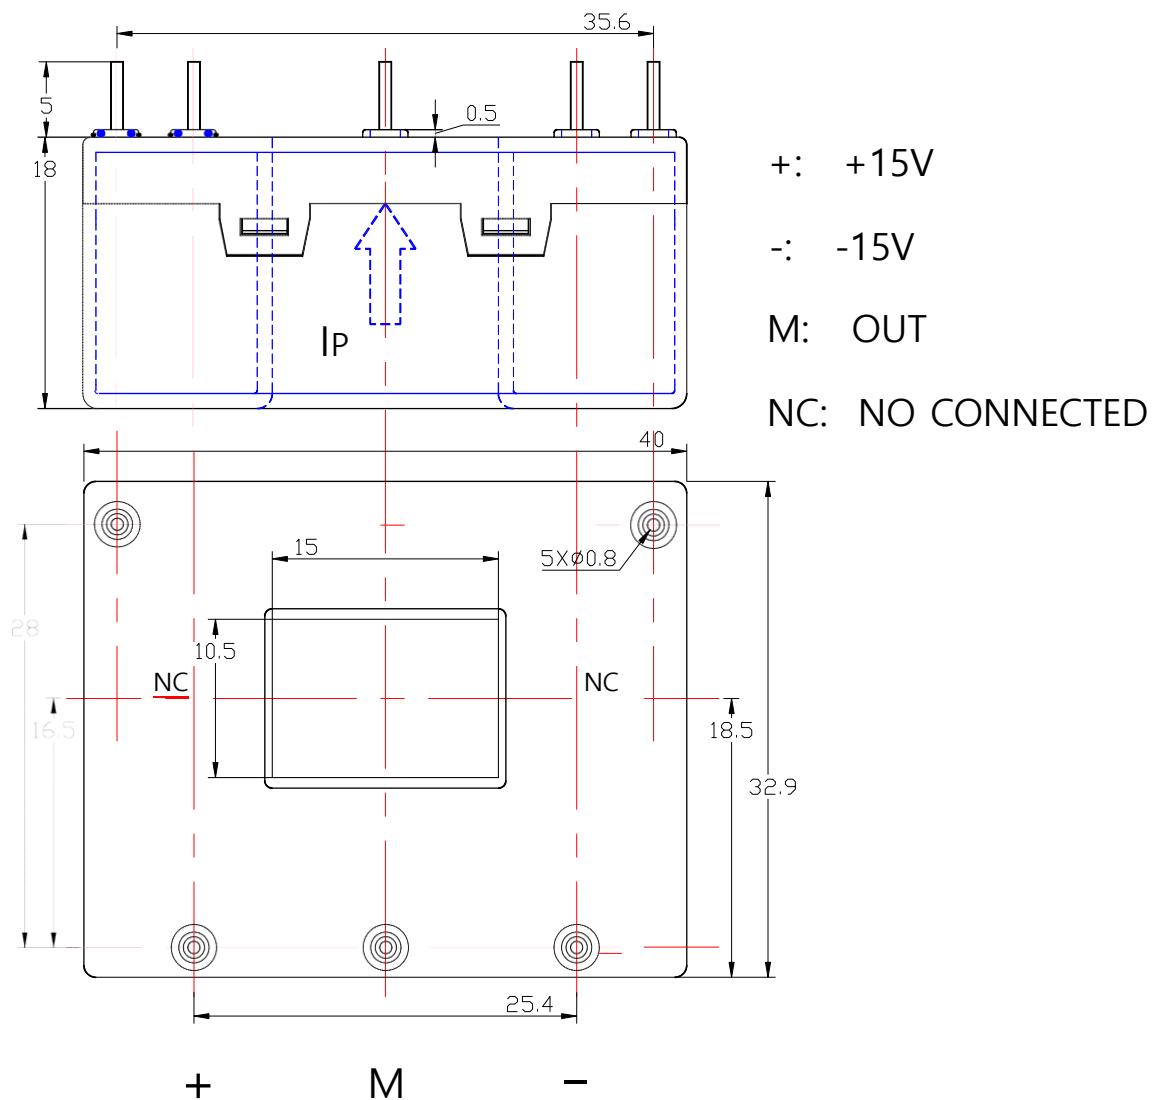

Remarks :

1. All dimensions are in mm.
2. General tolerance $\pm 1\text{mm}$.

Directions for use

1. When measure current flows according to the direction of the arrowhead, Output terminal gets the same phase current.
2. The primary conductor should be $\leq 120^{\circ}\text{C}$.
3. The dynamic performance (di/dt and the response time) is the best when the primary hole is fully filled with the bus bar.
4. When the current will be measured goes through a sensor, the voltage will be measured at the output end.
(Note: The false wiring may result in the damage of the sensor)
5. Custom design in the different rated input current and the output current are available.

Standards


UL94-V0
EN60947-1:2004
IEC60950-1:2001
EN50178:1998
SJ 20790-2000

General data

	Value	Unit	Symbol
Operating temperature	-40 to +85	$^{\circ}\text{C}$	TA
Storage temperature	-40 to +125	$^{\circ}\text{C}$	TS
Mass(approx)	25	g	M

Characteristics chart

Pulse current signal response characteristic

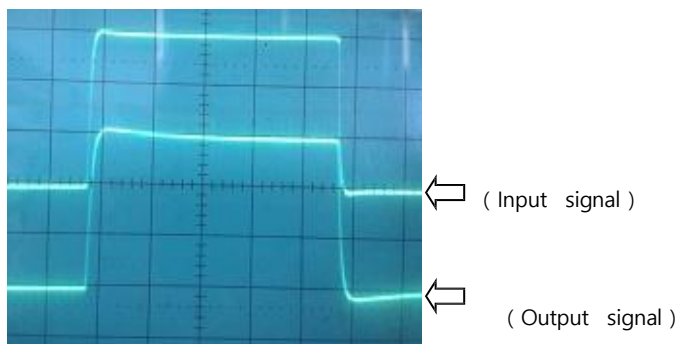

Effects of impulse noise

