



TBC- LP2 series current sensor is a closed loop device based on the measuring principle of the hall effect and null balance method, with a galvanic isolation between primary and secondary circuit. It provides accurate electronic measurement of DC, AC or pulsed currents.


## Electrical data (Ta=25°C±5°C)

<div>Type</div> <div>Parameter</div>	TBC50LP2	TBC100LP2	TBC125LP2	Unit
Rated input (I <sub>pn</sub> )	±100	±100	±125	A
Measure range (I <sub>p</sub> )	±100(±15V , 100Ω)	±200(±15V , 30Ω)	±200(±15V , 30Ω)	A
Turns ratio (N <sub>p</sub> /N <sub>s</sub> )	1:1000	1:1000	1:1000	T
Secondary coil resister	30	30	30	Ω
Rated output (I <sub>sn</sub> )	50±0.5%	100±0.5%	125±0.5%	mA
Measure resister (R <sub>M</sub> )	10-100			Ω
Supply voltage	±12 ~ ±15			V
Power consumption	≤20+I <sub>p</sub> X(N <sub>p</sub> /N <sub>s</sub> )			mA
offset current	@I <sub>p</sub> =0	≤±0.2		mA
Offset current drift	≤±0.5			mA
Linearity	@I <sub>p</sub> =0-±I <sub>pn</sub>	≤0.1		%FS
Band-width	@-3dB	DC-200		KHz
Response time	@100A/μS,10%-90%	≤1		μs
Galvanic isolation	@ 50HZ,AC,1min	3.0		KV

## Applications

- AC variable speed drives
- Static converters for DC motor drives
- Variable speed drives
- Power supplies for welding applications
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)

## Mechanical dimension (for reference only)

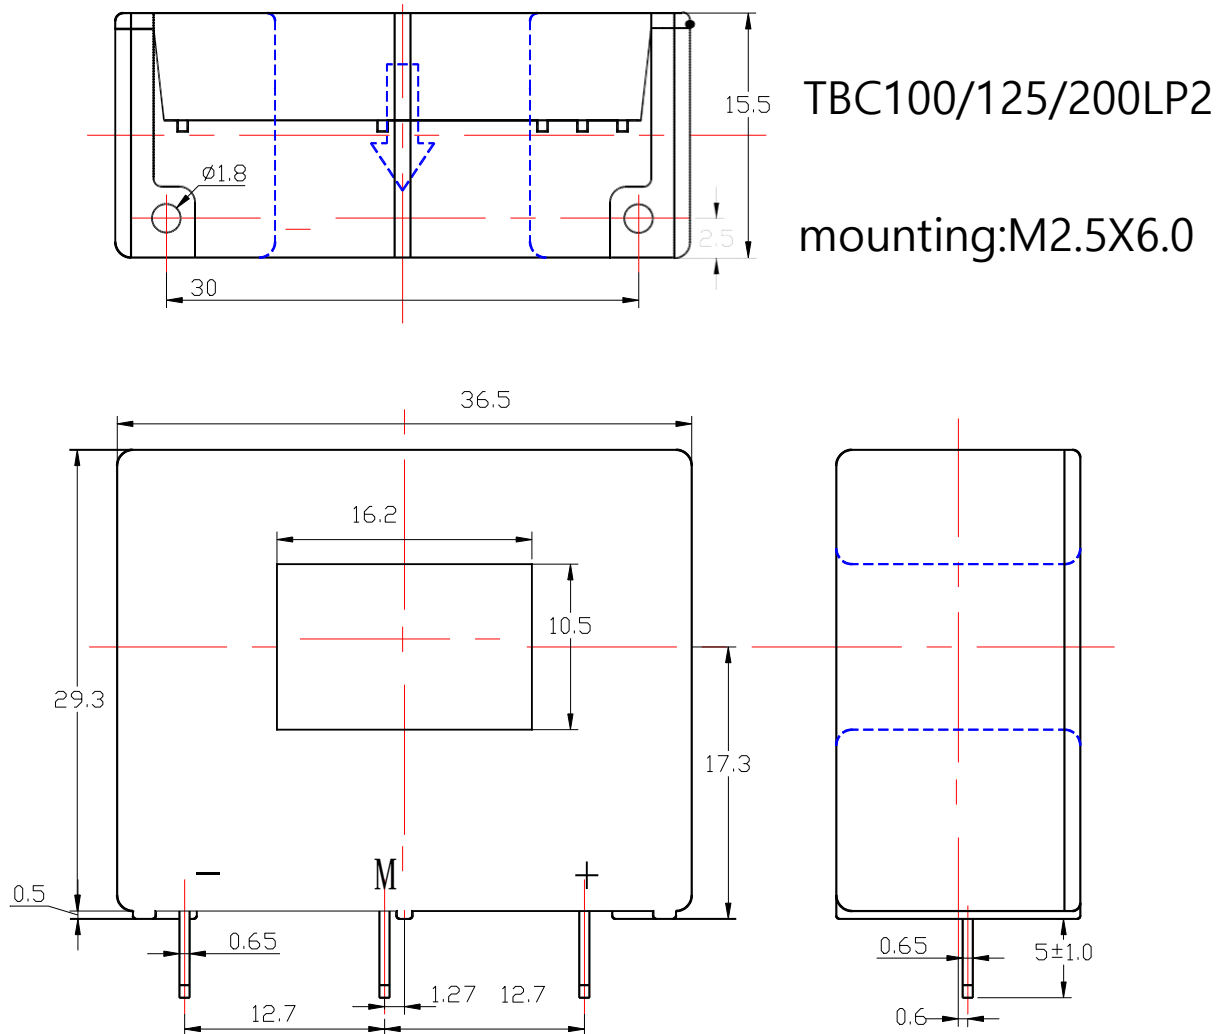

Remarks :

1. All dimensions are in mm.
2. General tolerance  $\pm 1\text{mm}$ .

## Directions for use

1. When measure current flows according to the direction of the arrowhead, Output terminal gets the same phase current.
2. The primary conductor should be  $\leq 120^{\circ}\text{C}$ .
3. The dynamic performance (di/dt and the response time) is the best when the primary hole is fully filled with the bus bar.
4. The primary turns should be at the top of the sensor for the best magnetic coupling.
5. When the current will be measured goes through a sensor, the voltage will be measured at the output end.  
(Note: The false wiring may result in the damage of the sensor)
6. Custom design in the different rated input current and the output current are available.

## Standards


UL94-V0  
EN60947-1:2004  
IEC60950-1:2001  
EN50178:1998  
SJ 20790-2000

## General data

	Value	Unit	Symbol
Operating temperature	-40 to +85	$^{\circ}\text{C}$	TA
Storage temperature	-40 to +125	$^{\circ}\text{C}$	TS
Mass(approx)	25	g	M

## Characteristics chart

Pulse current signal response characteristic

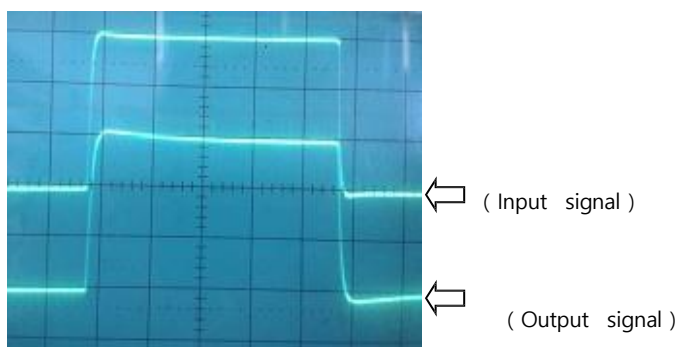

Effects of impulse noise

