



TBC-LTA5V-1 Series current sensor is a closed loop device based on the measuring principle of the hall effect, with a galvanic isolation between primary and secondary circuit, it is used for precision measurement of DC, AC and pulse current.


Electrical data (Ta=25°C±5°C)

<div>Type</div> <div>Parameter</div>	TBC50LTA5V-1	TBC100LTA5V-1	TBC200LTA5V-1	TBC300LTA5V-1	TBC400LTA5V-1	Unit
Rated input Ipn)	±50	±100	±200	±300	±400	A
Measure range (Ip)	±75	±150	±300	±450	±580	A
Turns ratio (Np/Ns)	1:1000		1:2000	1:3000		T
Secondary resister	15		28	52		Ω
Rated secondary output	±50	±100	±100	±100	±133.3	mA
Rated output	±5±0.5%					V
Supply voltage	±15±5%					V
Power consumption	≤25+IpX(Np/Ns)					mA
Zero voltage	@Ip=0	≤±15				mV
Zero Offset drift	≤±0.75 (Typ) ,≤±2.0 (Max)					mV/°C
Output drift	≤±0.25 (Typ) ,≤±0.75 (Max)					mV/°C
Response time	@50A/μS, 10%-90%	< 1.0				μs
Linearity	@Ip=0-±Ipn	≤0.1				%FS
Galvanic isolation	@ 50Hz,AC,1min	6				KV
di/dt accurately followed	≥50					A/μs
Band-width	@-3dB	DC-200				KHz

Applications

- Variable speed drives
- Welding machine
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Electrochemical

Mechanical dimension (for reference only)

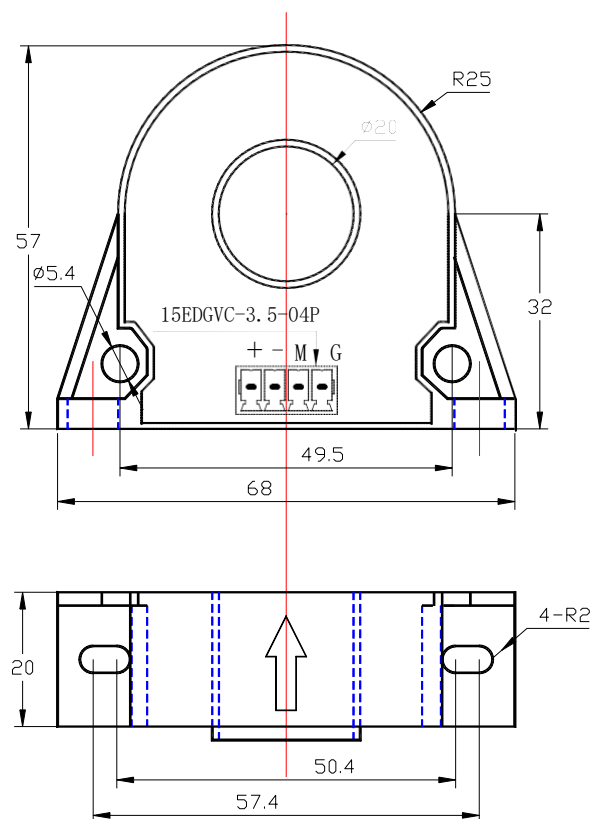

Remarks :

1. All dimensions are in mm.
2. General tolerance $\pm 1\text{mm}$

Directions for use

1. Is will be in a forward direction when the I_p flows according to the direction of the arrowhead.
2. The primary conductor should be $\leq 100^\circ\text{C}$.

3. The dynamic performance (di/dt and the response time) is the best when the primary hole is fully filled with the bus bar.
4. The primary turns should be at the top of the sensor for the best magnetic coupling.

Standards


UL94-V0
 EN60947-1:2004
 IEC60950-1:2001
 EN50178:1998
 SJ 20790-2000

General data

	Value	Unit	Symbol
Operating temperature	-40 to +85	°C	TA
Storage temperature	-40 to +125	°C	TS
Mass(approx)	75	g	M

Characteristics chart

Pulse current signal response characteristic

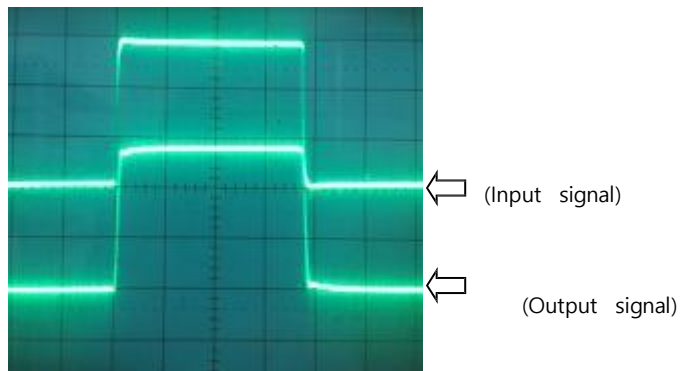

Effects of impulse noise

