

# **TBC-DS3.3** Series Multi-range Closed Loop Mode Hall Effect Current Sensor





TBC-DS3.3 series multi-range current sensor is a closed loop device based on the measuring principle of the hall effect and null balance method, with a galvanic isolation between primary and secondary circuit. It provides accurate electronic measurement of DC, AC or pulsed currents.


## Electrical data (Ta=25°C±5°C)

Type Parameter	TBC06DS3.3	TBC15DS3.3	TBC25DS3.3	TBC50DS3.3	Unit
Rated input (Ipn)	±6	±15	±25	±50	А
Measure range (lp)	±12	±30	±50	±100	А
Secondary turns (Ns)	960±1	960±1	960±1	960±1	Т
Internal resister	25±0.1%	10±0.1%	6±0.1%	3±0.1%	Ω
Rated output (Vsn)	lp=±lpn ±0.625±0.5%				V
Supply voltage	+3.3±5%				V
Power consumption	≤15+Ip/Ns				mA
Zero voltage	@ lp=0 1.65±0.5%				V
Zero voltage drift	≤±0.05 ( Typ ) ,≤±0.075 ( Max )				
output drift	≤±0.05 ( Typ ) ,≤±0.1 ( Max )				
Linearity	@ lp=0-±lpn ≤ 0.1				%FS
Total precision	@ -40 ~ +105°C ≤±0.7				%
di/dt accurately followed	> 50				A/μS
Response time	@ lp=lpn, 50 A/μS ,10%-90% <1				
Band- width	@-3dB DC-200				
Galvanic isolation	@ 50HZ,AC,1min 2.5				KV

## Applications

- AC variable speed drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications
- Solar inverters

# Mechanical dimension (for reference only)

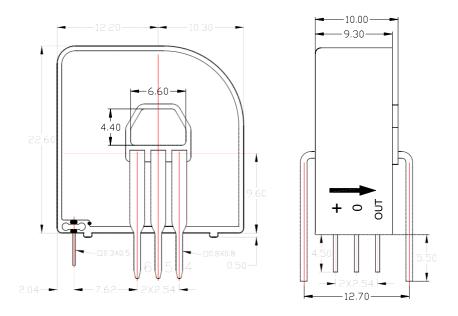

#### Remarks:

- 1. All dimensions are in mm.
- 2. General tolerance ±1mm.

## Pin connections

Turn	IPN ( A ) Rated	Vo(V) Rated	[mΩ] Primary	[uH] Primary	Connected
S	current	output	impedance	inductance	points
1	±6 ( ±15, ±25,±50 )	1.65±0.625	0.18	0.013	0 4 OUT
2	±3 ( ±7.5, ±12.5, ±25 )	1.65±0.625	0.81	0.05	6 4 OUT
3	±2 ( ±5, ±8.3,±16.6 )	1.65±0.625	1.62	0.12	
					000



# **TBC-DS3.3** Series Multi-range Closed Loop Mode Hall Effect Current Sensor

## **Directions for use**

- 1. When the current will be measured goes through a sensor, the voltage will be measured at the output end. (Note: The false wiring may result in the damage of the sensor)
- 2. Custom design in the different rated input current and the output voltage are available.

## **Standards**

UL94-V0.

EN60947-1:2004

IEC60950-1:2001

EN50178:1998


SJ 20790-2000

#### **General data**


	Value	Unit	Symbol
Operating temperature	-40 to +105	°C	TA
Storage temperature	-40 to +125	°C	TS
Mass ( approx )	10	g	M

#### **Characteristics chart**

Pulse current signal response characteristic

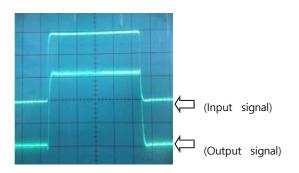

## Effects of impulse noise

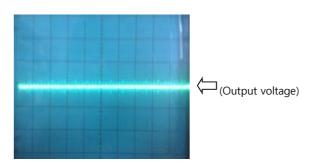

## Primary Current(Ip)--Output

