



TBC-DHS5 series multi-range current sensor is a closed loop device based on the measuring principle of the hall effect and null balance method, with a galvanic isolation between primary and secondary circuit. It provides accurate electronic measurement of DC, AC or pulsed currents.


## Electrical data ((Ta=25°C±5°C, RL=2KΩ, CL=10000PF)

| Type<br>Parameter                 | TBC06DHS5  | TBC15DHS5 | TBC25DHS5 | TBC50DHS5 | Unit  |
|-----------------------------------|--|-----------|-----------|-----------|-------|
| Rated input (I <sub>pn</sub> )    | ±6   | ±15       | ±25       | ±50       | A     |
| Measure range (I <sub>p</sub> )   | ±18  | ±45       | ±75       | ±150      | A     |
| Secondary turns (N <sub>s</sub> ) | 960±1  | 960±1     | 960±1     | 960±1     | T     |
| Internal resister                 | 25±0.1%  | 10±0.1%   | 6±0.1%    | 3±0.1%    | Ω     |
| Rated output                      | I <sub>p</sub> =±I <sub>pn</sub> ±0.625±0.5%               |           |           |           | V     |
| Supply voltage                    | +5±5%  |           |           |           | V     |
| Power consumption                 | ≤15+I <sub>p</sub> /N <sub>s</sub>                         |           |           |           | mA    |
| Zero voltage                      | @ I <sub>p</sub> =0 2.5±0.4%                               |           |           |           | V     |
| Zero voltage drift                | ≤±0.05 ( Typ ) , ≤±0.075 ( Max )                           |           |           |           | mV/°C |
| output drift                      | ≤±0.05 ( Typ ) , ≤±0.1 ( Max )                             |           |           |           | mV/°C |
| Linearity                         | @ I <sub>p</sub> =0-±I <sub>pn</sub> ≤0.1                  |           |           |           | %FS   |
| Total precision                   | ≤±0.7  |           |           |           | %     |
| di/dt accurately followed         | > 50   |           |           |           | A/μS  |
| Response time                     | @ I <sub>p</sub> =I <sub>pn</sub> , 50 A/μS ,10%-90% < 500 |           |           |           | nS    |
| Bandwidth                         | @-3dB DC-200   |           |           |           | KHz   |
| Galvanic isolation                | @ 50HZ, AC,1min 2.5  |           |           |           | KV    |

## Applications

- AC variable speed drives
- Static converters for DC motor drives
- Variable speed drives
- Power supplies for welding applications
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Solar Inverters




## Mechanical dimension (for reference only)

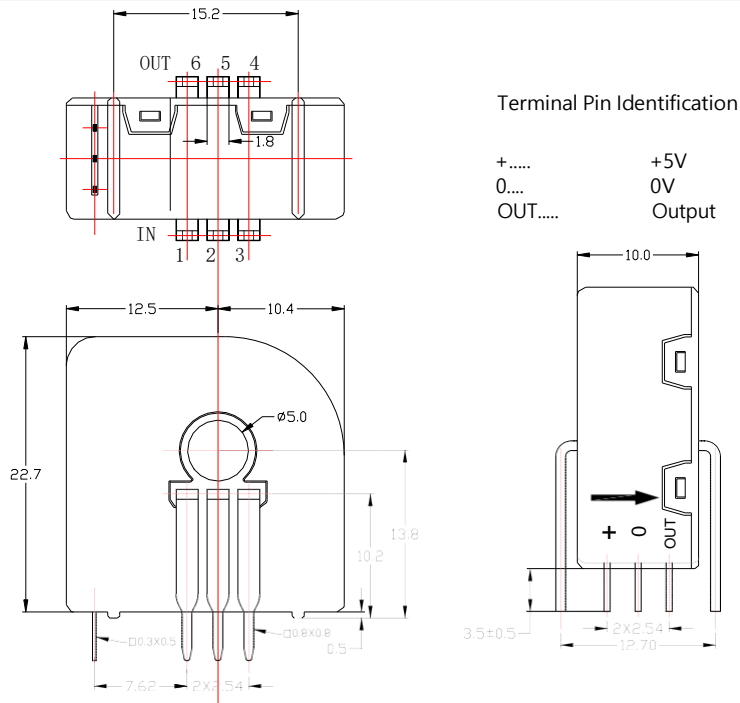


Remarks :

1. All dimensions are in mm.
2. General tolerance  $\pm 1\text{mm}$ .

## Pin connections

| Turns | IPN ( A ) Primary rated current       | Vout ( V ) Rated output | [mΩ] Primary impedance | [uH] Primary | Connected points  |
|-------|---------------------------------------|-------------------------|------------------------|--------------|---|
| 1     | $\pm 6 ( \pm 15, \pm 25, \pm 50 )$    | $2.5 \pm 0.625$         | 0.18                   | 0.013        |  |
| 2     | $\pm 3 ( \pm 7.5, \pm 12.5, \pm 25 )$ | $2.5 \pm 0.625$         | 0.81                   | 0.05         |  |
| 3     | $\pm 2 ( \pm 5, \pm 8.3, \pm 16.6 )$  | $2.5 \pm 0.625$         | 1.62                   | 0.12         |  |



## Directions for use

1. When the current will be measured goes through a sensor, the voltage will be measured at the output end.  
(Note: The false wiring may result in the damage of the sensor)
2. Custom design in the different rated input current and the output voltage are available.

## Standards


- UL94-V0
- EN60947-1:2004
- IEC60950-1:2001
- EN50178:1998
- SJ 20790-2000

## General data

|                       | Value       | Unit | Symbol |
|-----------------------|-------------|------|--------|
| Operating temperature | -40 to +105 | °C   | TA     |
| Storage temperature   | -40 to +125 | °C   | TS     |
| Mass(approx)          | 10          | g    | M      |

## Characteristics chart


Pulse current signal response characteristic

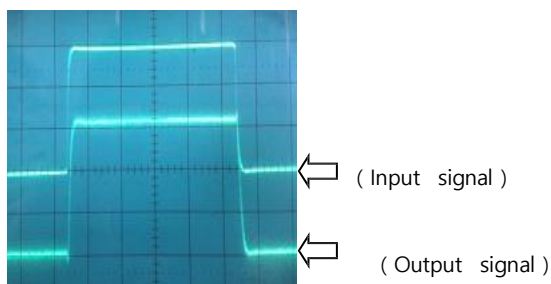

Effects of impulse noise



Input current-Output Voltage characteristic



Operation Principle

